



CABLETIGHT™ WIRE MANAGEMENT SYSTEM — RIGID CONDUIT SYSTEM

The UPP™ brand CableTight™ Wire Management System provides a true end-to-end solution for electrical, sensor, and data wiring containment. All of the benefits of the field-proven electrofusion welded pipework system are applied to this crucial part of the forecourt installation to ensure a fully liquid-tight underground system.

HIGHLIGHTS

- Electrofusion entry seals with integrated compression grommets create a leak proof system by eliminating liquid or vapour penetration.
- Rigid conduit entry fitting handles one to three ¾" bore rigid conduit entries.

ORDER INFORMATION

Rigid Conduit Entry Seal

The rigid conduit entry seals handles one to three ¾" (nominal 26.7 mm O/D) rigid conduit entries where local regulations require steel conduit.

Model	Description
305-3X27MM-CON	Electrofusion triple rigid conduit entry seal, for ¾" (nominal 26.7 mm O/D) rigid conduit, (3) entries
408128001	Cable plug for ¾" entry fitting
408117001	Replacement ¾" (nominal 26.7 mm O/D) grommet



Rigid Conduit Installation Tools

Model	Description
305-EXT-CLAMP	Welding clamp for 305-3X27MM-CON
HS6	160 mm hole saw



Transition Chamber

Built specifically for wire management, the rugged transition chamber provides an easy access point for the electrician for maintenance or future expansion.

Model	Description
ECH-760-660-D400	Transition chamber, 700 mm x 600 mm
408109001	Removable segregation panel
VTL-750X650	Transition chamber test lid assembly, 750 mm x 650 mm



Model	Description
PCR-LIFT	Transition chamber access cover lifting tool



SPECIFICATIONS



Transition Chamber Dimensions	900 W x 800 D x 862 H
Transition Chamber Composition	— LLDPE chamber — D400 load rated composite access cover and frame (factory tested to -30mbar)

Components

Systems and their various components installed.

- 1 Transition chamber with cover
- 2 Triple rigid conduit entry seal
- 3 Rigid conduit (locally supplied)

Rigid Conduit System

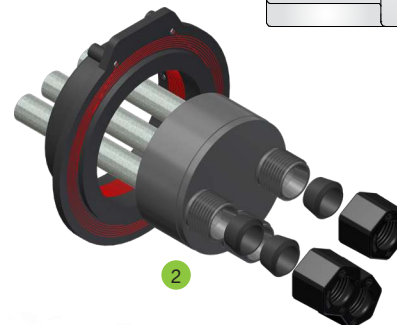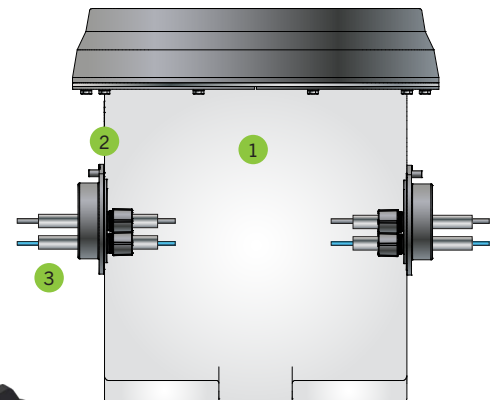

Grommets included