



LOW PROFILE DISPENSER SUMPS



The Low Profile Dispenser Sump features a tapered top design that seamlessly accommodates both non-island and island dispenser installations, offering flexibility for various forecourt setups. The Low Profile Dispenser Sump houses and protects critical under-dispenser components, including piping connections, electrical conduits, and shear valves, keeping them secure and shielded from external elements while allowing for easy access during routine maintenance and inspections.

HIGHLIGHTS

- The tapered top design is engineered for optimal installation flexibility and strength. This design allows the top half to taper inward, maximizing concrete contact whether installed with or without an island form. This ensures a stable and secure fit in any forecourt application, enhancing the overall durability and reliability of the sump installation.
- The closed mold fiberglass manufacturing process creates an ultra smooth exterior sump surface, ensuring that entry boots can effectively seal against it. This smooth finish is crucial for achieving watertight connections, preventing leaks, and maintaining the integrity of the entire underground system.
- The flat sump ends and top frame facilitate the easy installation of electrical conduit, eliminating the need for additional conduit bending. Electrical conduit enters the dispenser directly from the bottom, avoiding sump wall penetrations and eliminating potential leak paths.
- Tapered top evenly distributes weight of backfill and concrete.
- Large base body for up to 5 pipe entries.
- Flat base ends for easy electrical conduit mount / dispenser entry.
- Factory installed stabilizer bar tracks for shear valve mounting.
- Corrosion-resistant powder coated steel top frame.
- Wide mouth for easy equipment install and maintenance access.
- Resin-rich fiberglass construction for lasting durability.
- Interior white gel coating for increased visibility and protection.
- Gilbarco Encore® and Wayne Ovation® compatible models.
- Banded two-sump models with polyethylene sump for Gilbarco Encore® and Wayne Ovation® DEF dispensers.
- UL2447 listed.


SPECIFICATIONS

- | | | |
|---------------------------|-------------------------|----------------------------|
| 1 Smooth sump exterior | 3 Conduitless top frame | 5 Tapered top |
| 2 White gel coat interior | 4 Stabilizer bar tracks | 6 Conduit mounting channel |

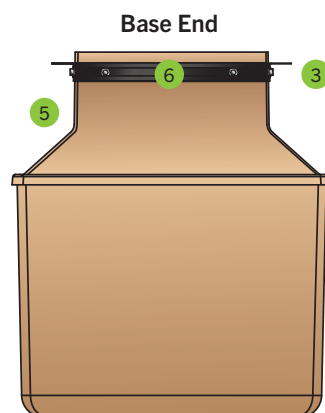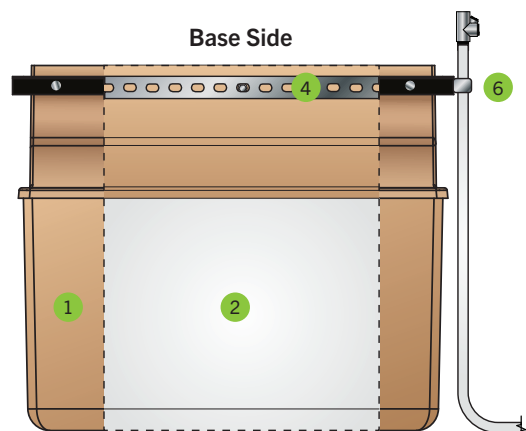


SPECIFICATIONS CONTINUED

Gilbarco Encore® Low Profile Single Wall Fiberglass Dispenser Sump

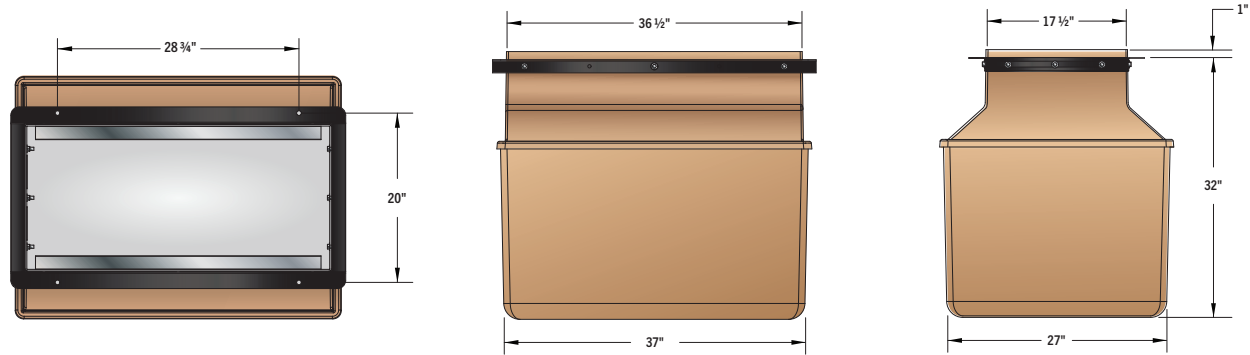


Gilbarco Encore® Low Profile Single Wall Fiberglass Dispenser Sump Dimensions with Banded DEF Polyethylene Sump

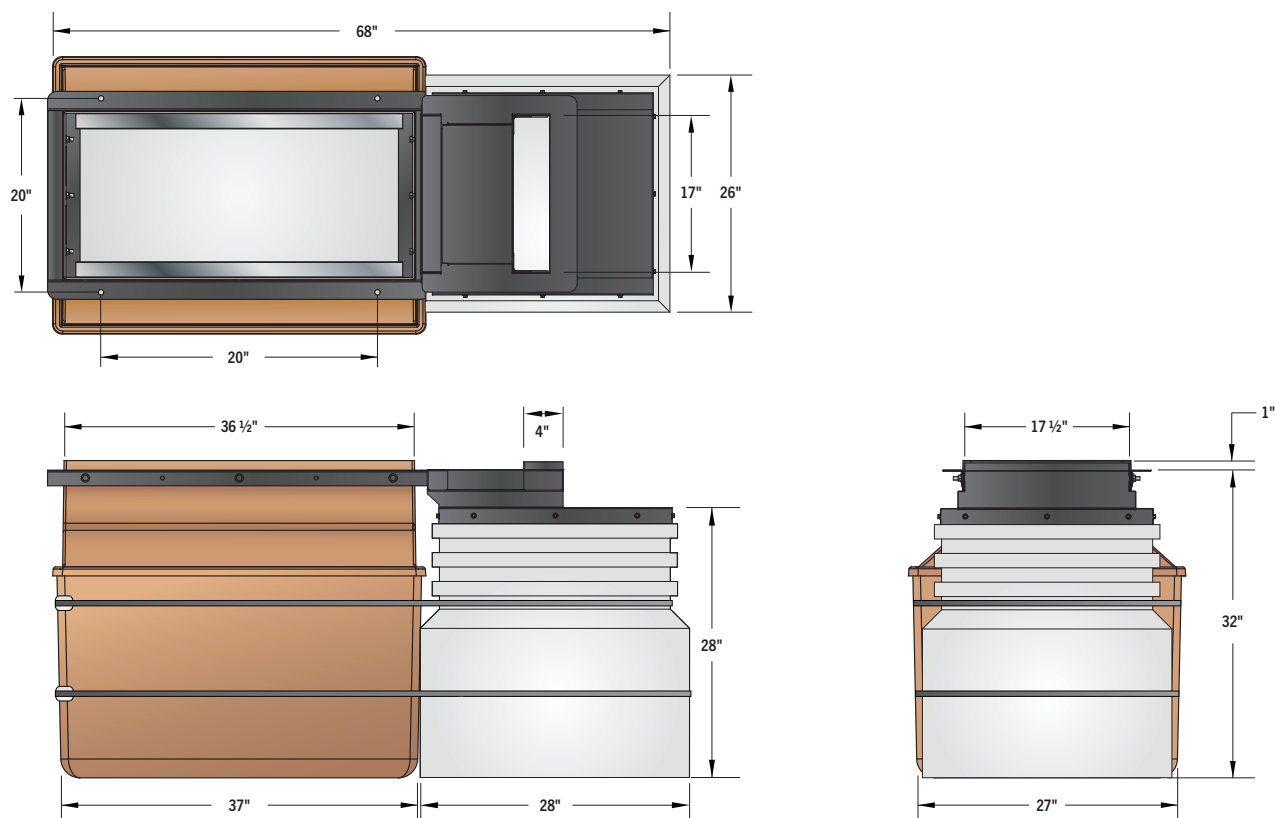


SPECIFICATIONS CONTINUED

Wayne Ovation® Low Profile Single Wall Fiberglass Dispenser Sump

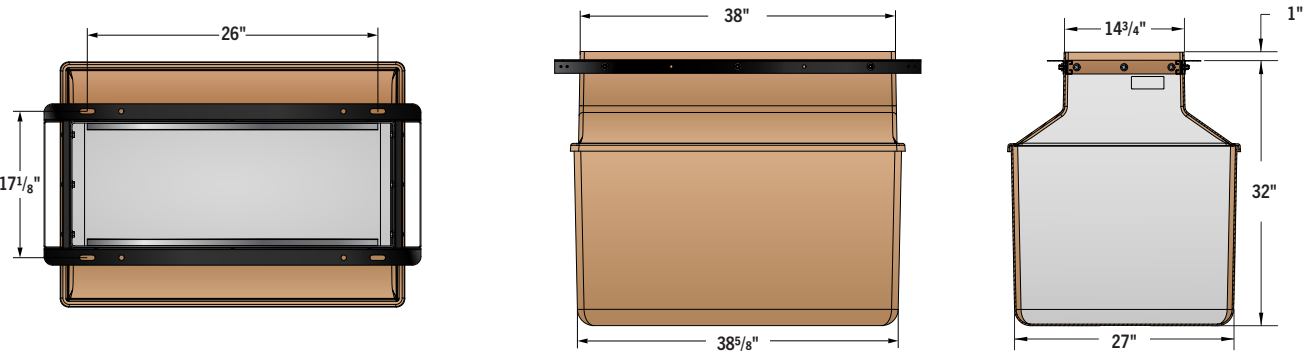

Wayne Ovation® Low Profile Single Wall Fiberglass Dispenser Sump with Banded DEF Polyethylene Sump

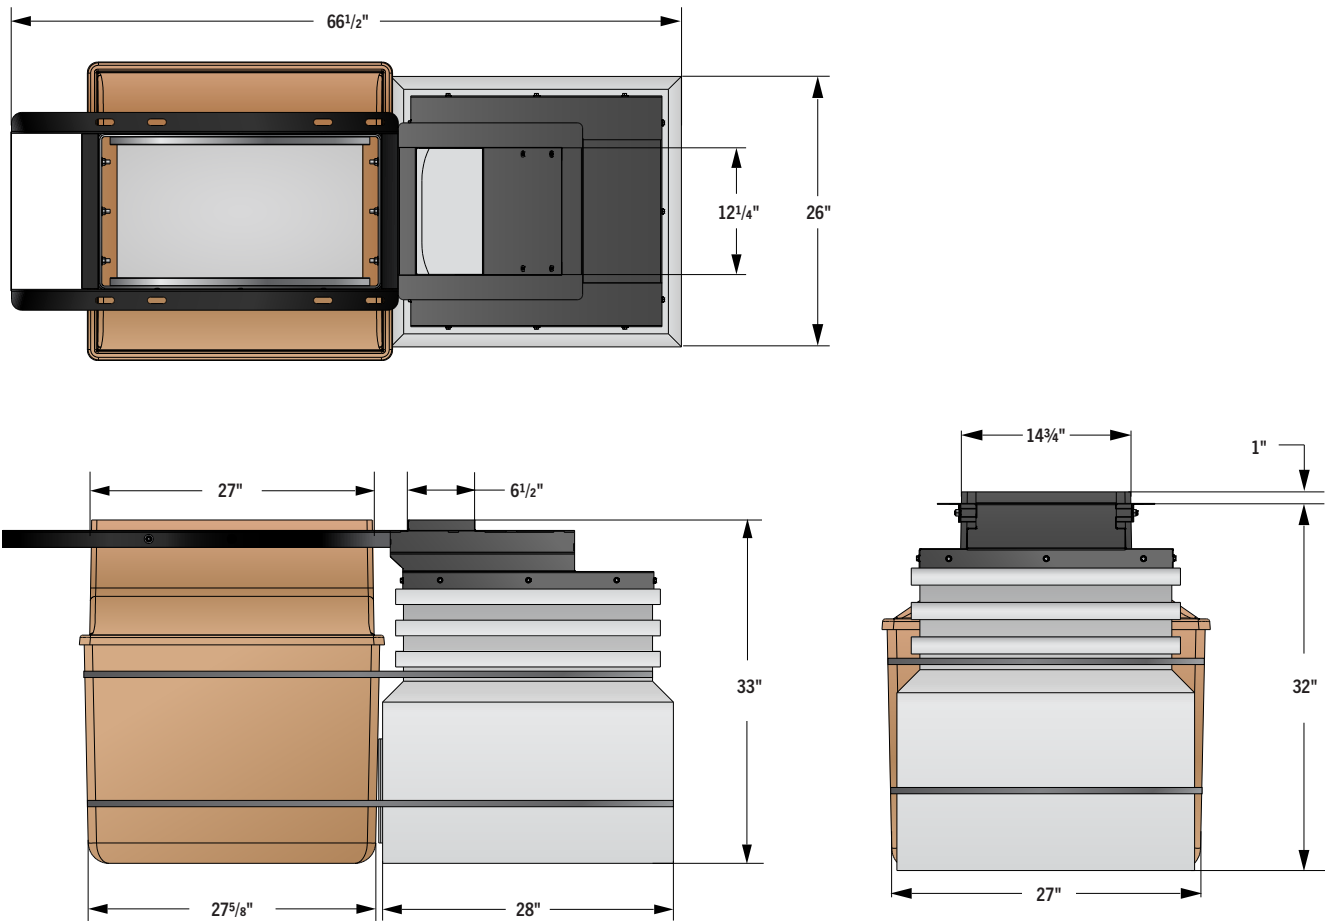

ORDERING INFORMATION

Low Profile Single Wall Fiberglass Dispenser Sump



Model	Description	Stabilizer Bar Kit
602375004	Single wall fiberglass sump for Gilbarco® Encore™ dispenser models	SBK-3-1-U
602377904	Single wall fiberglass sump with banded DEF polyethylene sump for Gilbarco® Encore™ with DEF dispenser models	SBK-3-1-U
LPOVA-3814	Single wall fiberglass sump for Wayne® Ovation® 2 and High Speed Diesel dispenser models	SBK-25-1-U
LPOVA-2714-DEF	Single wall fiberglass sump with banded DEF polyethylene sump for Wayne® Ovation® High Speed + DEF dispenser models	SBK-25-1-U

Notes: One stabilizer bar kit per shear valve is required.
-U indicates UL compliance.

Encore® is a registered trademark of Gilbarco Inc.

Ovation® is a registered trademark of Dover.