DEF Safe-T-Break®

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Model 007219

- Non-reconnectable Safe-T-Break®
- Low profile design
- Thread sealant not required with BSPP thread
- 100% DEF compatible parts
- Instant-closing, dual poppet check valve design
- Maximum separation of 300 lbf/1334.5 N
- Comes standard with guard

Model 008216

- Reconnectable Safe-T-Break®
- Maximum separation of 200 lbf/889.6 N
- 100% DEF compatible parts
- Thread sealant not required with BSPP threads
- Instant-closing, dual poppet check valve design
- Comes standard with guard

Model 012070

- Reconnectable Safe-T-Break®
- Maximum separation of 200 lbf/889.6 N
- 100% DEF compatible parts
- Instant-closing, dual poppet check valve design
- Comes standard with guard
- DEF compatible thread sealant required for 3/4" NPT threads


Safe-T-Breaks®

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
007219	1" M x 1" M Stainless Steel Non-Reconnectable Safe-T-Break®	0.90 (.40)
008216	1" M x 1" M BSPP Stainless Steel Reconnectable Safe-T-Break®	0.94 (.43)
012070^	3/4" F x 3/4" F NPT Reconnectable Safe-T-Break®	0.54 (.20)
012659^	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break®	.54 (.20)

^ NOT LISTED

Construction

Body	Stainless Steel, 012070 - Anodized Aluminum
Seals	Fluorocarbon
Inlet	1" / 25.4 mm BSPP, 012070 - 3/4" / 19.1 mm NPT

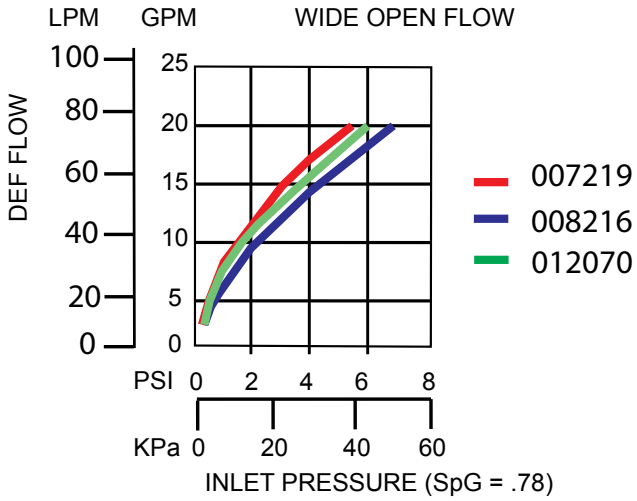

Model 008216



Model 012070/012659



Model 007219



ISO 9001:2015 CERTIFIED COMPANY

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DEF Safe-T-Break®

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Dimensions and System Options


Guards

MODEL NO.	DESCRIPTION
007224	Black Scuff Guard
006534	Dispenser Scuff Guard
003097	Scuff Guard

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007407	1" BSPP Seal Kit Assembly


Model 007219

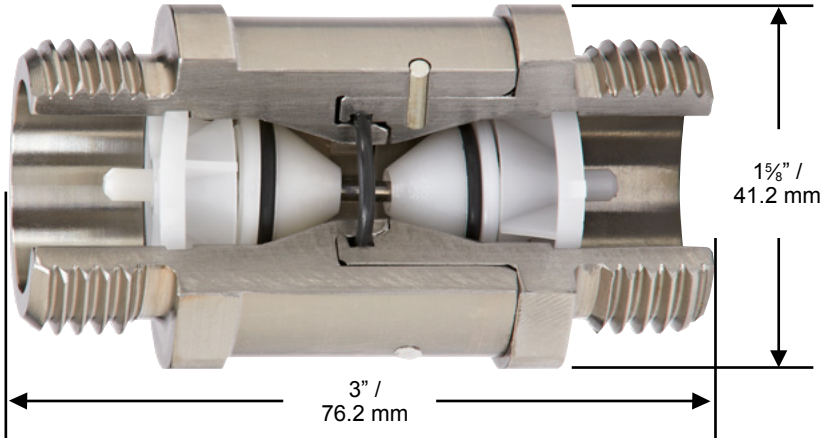

Model 012070/012659



Model 008216

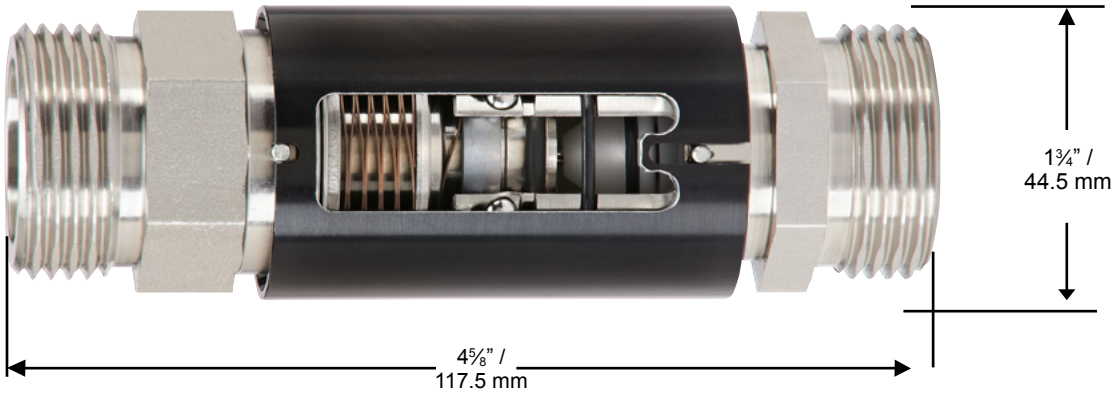

Rev 9 4/25