
E25/E85 MAGBREAK®

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

- High impact resistant polymer housing
- Compatible with unleaded, diesel, and all Ethanols blends through E85
- Features same separation mechanism as Model 008330
- Lighter than competing magnetic breakaways
- Two straight screwdrivers used to separate
- For easier install and maintenance on other hanging hardware
- Assurance of proper reconnection using a simple “twist to lock” feature
- Absorb line shock in excess of 450 psi at 17 gpm (31 bar at 64.3 Lpm)
- Low scuff housing
- Line shock absorbing design
- Stops flow on both sides of break

G2 E25/E85 MAGBREAK®

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
014647	G2 MAGBREAK® ¾” F x ¾” F E25/85 NPT (Separates at less than 200 pounds pull force)	1.21 (.55)

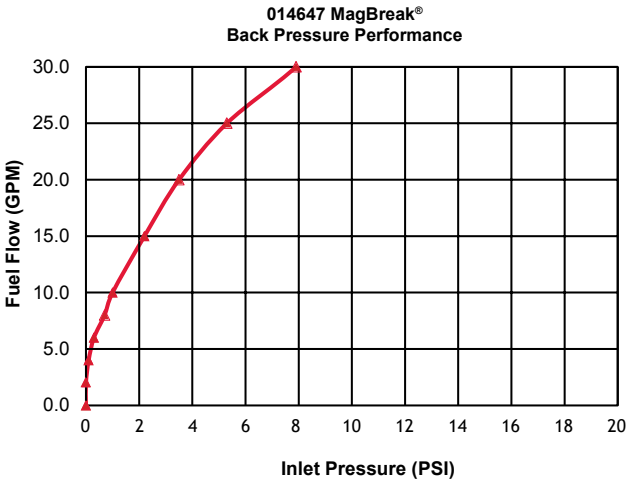



ISO 9001:2015 CERTIFIED COMPANY

c UL us

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

E25/E85 MAGBREAK®

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Dimensions

G2 E25/E85 Magbreak®



Rev 2 12/22