E85 Safe-T-Breaks®

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation.

- Compatible with unleaded, diesel and all Ethanol blends through E85
- Unit is lightweight, inexpensive and disposable.
- Features same instant closing dual poppet check valve design as Model 006360
- Maximum separation of 300 lbf/1334.5 N



Model 006273


E85 Safe-T-Breaks®

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
006273	¾" F x ¾" F Standard Non-Reconnectable Safe-T-Break®	.30 (.13)

Construction

Body	Aluminum with Electroless Nickel Plating
Seals	Fluorocarbon
Springs	Stainless Steel
Threads	¾" / 19.1 mm NPT

006273

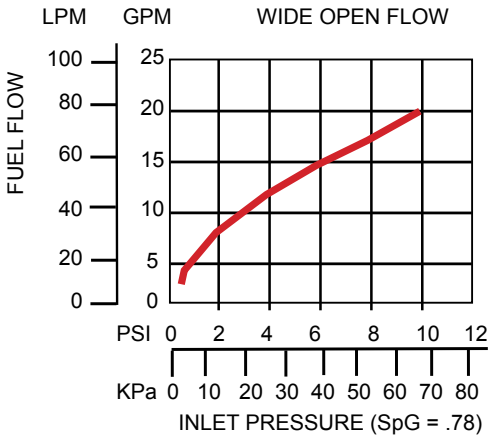

ISO 9001:2015 CERTIFIED COMPANY

UL®

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

E85 Safe-T-Breaks®


All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation.

Dimensions and System Options

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007000	Safe-T-Break® Drain Cup
003813	Safe-T-Break® Demonstration Kit

Model 006273

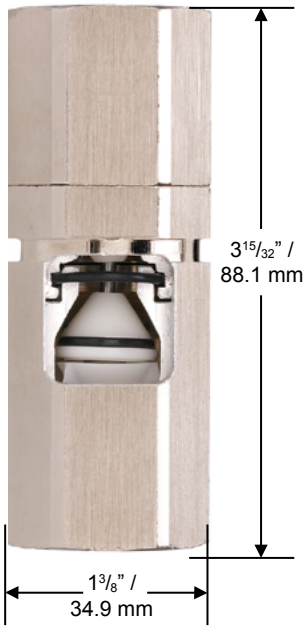

Rev 6 9/21