# F&C Standard STB

**All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.**

### Models 003360 & 003385

- Retains UL listing after reconnection
- Features a pre-loaded spring and a single turn wave spring that enables valve to resist sudden pressure build-up in the hose causing nuisance separations
- Separates at less than 200 lbf/889.6 N which minimizes "backlash" force of separation, reducing damage to equipment

### Model 005230

- Retains UL listing after reconnection
- Uses the same pre-loaded spring and a single turn wave spring as Model 003360
- Separates at less than 115 lbf/511.5 N

### Model 002273 & 002774

- Light-weight, inexpensive and disposable
- Same instant-closing dual poppet check valve design as Model 003360
- Separates at less than 300 lbf/1334.4 N

### Model 006130


- Internal Pressure Compensating Chamber (PCC) that prevents "line shock" nuisance separations
- Same instant-closing dual poppet check valve as Model 003360
- Separates at less than 225 lbf/1000.8 N




Model 003600



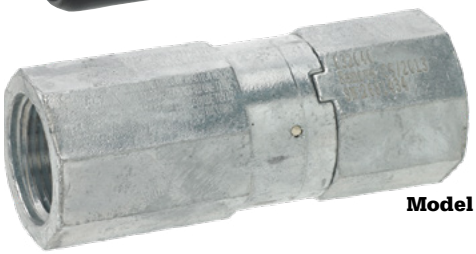
Model 006130



Model 002273

## Reconnectable with NPT

| MODEL NO. | DESCRIPTION | SHIPPING WEIGHT LBS (KG) |
|---|---|---|
| 003360** | ¾" F x ¾" F Reconnectable Safe-T-Break® with scuff guard | 0.59 (0.26) |
| 005230** | ¾" F x ¾" F Reconnectable Low-Pull Safe-T-Break® with scuff guard | 0.59 (0.26) |
| 03360R | ¾" F x ¾" F Reconnectable Safe-T-Break® With Scuff Guard For Retail | 0.59 (0.26) |

## Non-reconnectable with NPT

| MODEL NO. | DESCRIPTION | SHIPPING WEIGHT LBS (KG) |
|---|---|---|
| 002273 | ¾" F x ¾" F Non-Reconnectable Safe-T-Break® | 0.78 (0.35) |
| 006130** | ¾" F x ¾" F PCC Non-Reconnectable Safe-T-Break® with scuff guard | 0.52 (0.23) |
| 002273R | ¾" F x ¾" F Non-Reconnectable Safe-T-Break® For Retail | 0.52 (0.23) |

## Reconnectable with BSPP

| MODEL NO. | DESCRIPTION | SHIPPING WEIGHT LBS (KG) |
|---|---|---|
| 003385** | ¾" F x ¾" F Reconnectable Safe-T-Break® with scuff guard | 0.57 (0.25) |

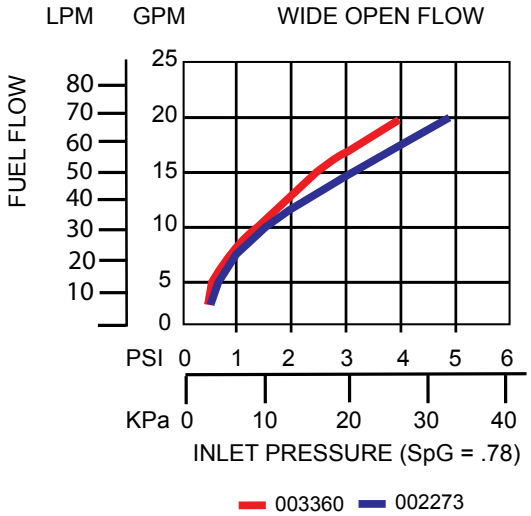
## Non-reconnectable with BSPP

| MODEL NO. | DESCRIPTION | SHIPPING WEIGHT LBS (KG) |
|---|---|---|
| 002774 | ¾" F x ¾" F Non-Reconnectable Safe-T-Break® | 0.73 (0.33) |
| 002774A* | ¾" F x ¾" F Non-Reconnectable Safe-T-Break® - Atex | 0.73 (0.33) |

**See page 2 for guard color options

## Construction

| RECONNECTABLE SAFE-T-BREAKS® | |
|---|---|
| Body | Aluminum |
| Seals | Fluorocarbon |
| Springs | Stainless Steel<br>Stainless steel load and latch spring reverse mechanism<br>Hardened stainless steel latch ring and balls |
| **NON-RECONNECTABLE SAFE-T-BREAKS®** | |
| Body | Zinc Alloys and Aluminum |




ISO 9001:2015 CERTIFIED COMPANY

c UL us

* Ex 0518 II 1 G EN 13617-2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

# F&C Standard STB

**All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.**

## Dimensions and System Options

### Guards

| MODEL NO. | DESCRIPTION |
|---|---|
| 003096** | Scuff Guard for Model 003360, 006130 and 005230 |
| 006503** | Dispenser Scuff Guard for Model 002273 and 002774 |

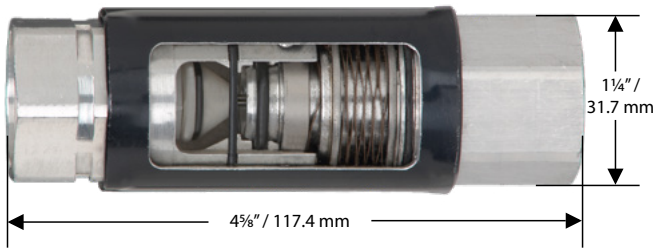
### Accessories, Testing and Maintenance

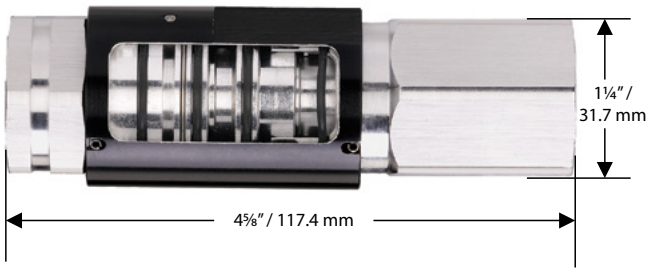
| MODEL NO. | DESCRIPTION |
|---|---|
| 007000 | Safe-T-Break® Drain Cup |
| 003813 | Safe-T-Break® Demonstration Kit |

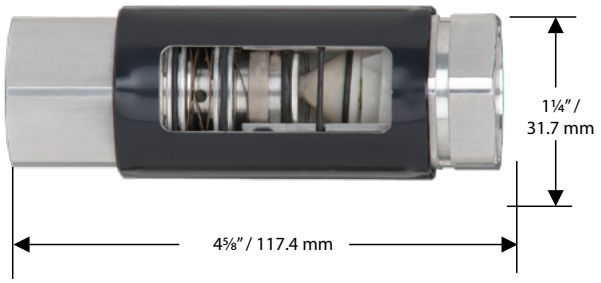
### Guard Color Chart

| COLOR | SUFFIX | COLOR | SUFFIX | COLOR *CUSTOM* | SUFFIX |
|---|---|---|---|---|---|
| Blue | -01 | Gold | -08 | Amoco Blue | -07 *CUSTOM* |
| Red | -02 | Silver | -09 | Apple Green | -18 *CUSTOM* |
| Green | -03 | BP Green | -16 | Purple | -19 *CUSTOM* |
| Black | -04 | M Blue | -21 | Pink | -20 *CUSTOM* |
| Yellow | -05 | Orange | -39 | BPS Green | -22 *CUSTOM* |
| White | -06 | | | | |

Scuff Guards are to be ordered with the corresponding guard color option added to the model number.
**Example:** If BLUE guards are desired, add guard color option -01 to the model number (159504-01).
**For custom colors, a minimum order of 4,000 guards will be required.**




*Rev 7 9/21*