F&C Standard Swivels

For standard fueling applications

Features

All Husky® Multi-Plane Swivels

- Compatible with unleaded, diesel, and Ethanol blends through E10
- Compact and light weight for easy handling
- High flow rates due to laminar flow design
- High strength step shoulder bearing diameters and impact absorbing stops

Model 002950 Restricted Swivel

- Multi-Plane, 210° spherical rotation at the swivel nut
- Double o-ring seals at each swivel provide long life at low temperatures (-40° F/C).


All Weather Swivels

- Multi-Plane, full 360° spherical rotation for easy movement of nozzle
- Double o-ring seals at each swivel provide long life at low temperatures (-40° F/C).

Model No.	Size	Thread	Type	Shipping Wt Lbs/Kg
000350	3/4" M x 3/4" F	NPT	Multi-Plane Swivel	.50/.22
000350R	3/4" M x 3/4" F	NPT	Multi-Plane Swivel for Retail	.50/.22
000352	1" M x 3/4" F	NPT	Multi-Plane Swivel	.66/.29
000355	3/4" M x 3/4" F	NPT	Multi-Plane Swivel, Black	.49/.22
000356	1" M x 3/4" F	NPT	Multi-Plane Swivel, Black	.66/.29
002272	3/4" M x 3/4" F	NPT	90° Swivel	.38/.17
001491	3/4" M x 3/4" F	BSPT	Multi-Plane Swivel	.50/.22
003590	3/4" M x 3/4" F	BSPP	Multi-Plane Swivel	.60/.27
003590A*	3/4" M x 3/4" F	BSPP	Multi-Plane Swivel - Atex	.60/.27
002771	3/4" M x 3/4" F	BSPP	90° Swivel	.38/.17
002771A*	3/4" M x 3/4" F	BSPP	90° Swivel - Atex	.38/.17

Construction

Body: High Aluminum Zinc Alloy
Inner O-ring: Fluorsilicone
Outer O-ring: Fluorocarbon

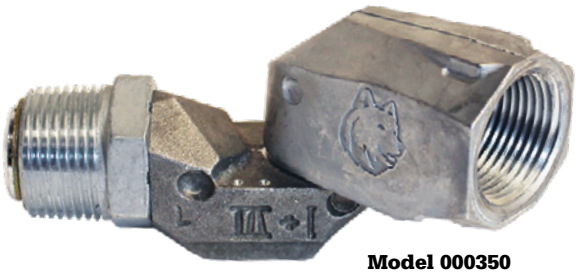

Model 000350



Model 002272

ISO 9001:2015 CERTIFIED COMPANY

c UL us

* Ex II 1 G EN13617-4


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

F&C Standard Swivels


For standard fueling applications

Dimensions


Model 000350

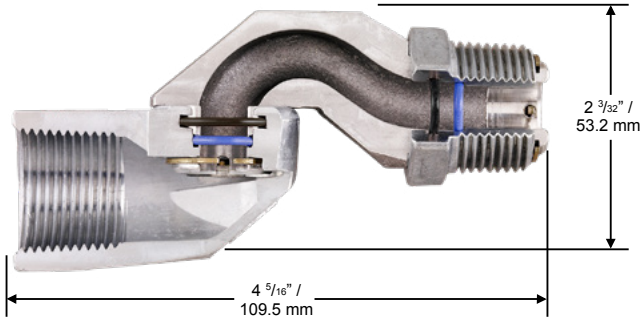

Model 002272

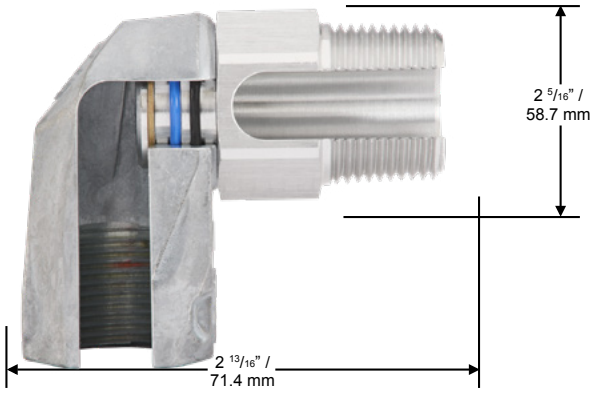

Flow Charts

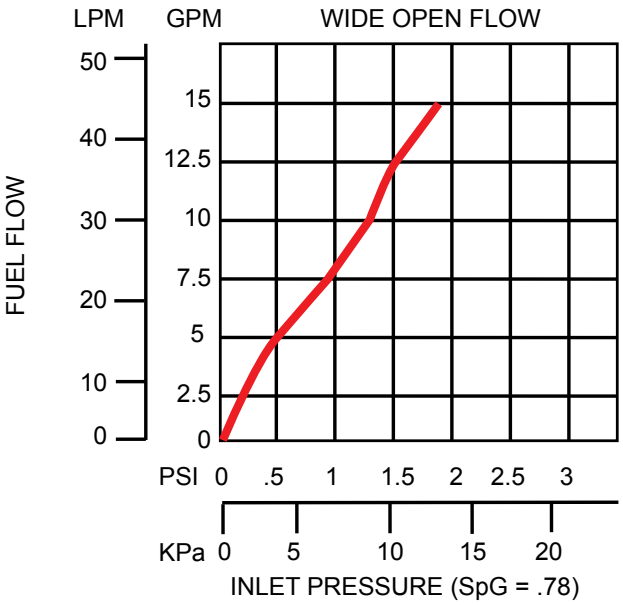

Rev 8 3/22