High Volume Swivel/STB

Husky® Model 005969 Swivel Safe-T-Break® Combination for truck and high volume fueling

- Multi-plane, full 360° spherical rotation for easy movement of nozzle
- Swivel Sync® feature to prevent separation failure in the 90° position.
- High strength step shoulder bearing diameters and impact absorbing stops
- Dynamic seals have double o-ring construction for long life and low temperature performance.
- Separates at less than 325 lbf/1,445.6 N which minimizes backlash force of separations, reducing damage to equipment
- Safe-T-Break® is reconnectable and retains UL listing after reconnecting.
- Dual check valves stop fuel in both directions.
- Internal pressure balancing chamber prevents "line shock" nuisance separations.
- Compatible with Ethanol blends through E10
- Compact and light weight for easy handling
- Easier to reconnect when installed at the nozzle
- Eliminates the need for a whip hose


Swivel/Safe-T-Break® Combination

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
005969	1" NPT M x 1" NPT F Multi-Plane Swivel Reconnectable Safe-T-Break®	1.5 (0.7)
008015	1" BSP M x 1" BSP F Multi-Plane Swivel Reconnectable Safe-T-Break®	1.5 (0.7)
008015A*	1" BSP M x 1" BSP F Multi-Plane Swivel Reconnectable Safe-T-Break® - Atex	1.5 (0.7)
008985	1" BSP M x 1" BSP M Multi-Plane Swivel Reconnectable Safe-T-Break®	1.5 (0.7)
008985A*	1" BSP M x 1" BSP M Multi-Plane Swivel Reconnectable Safe-T-Break® - Atex	1.5 (0.7)

Construction

Body	Aluminum, Zinc Alloy
Seals	Fluorocarbon
Springs	Stainless Steel
Threads	Various



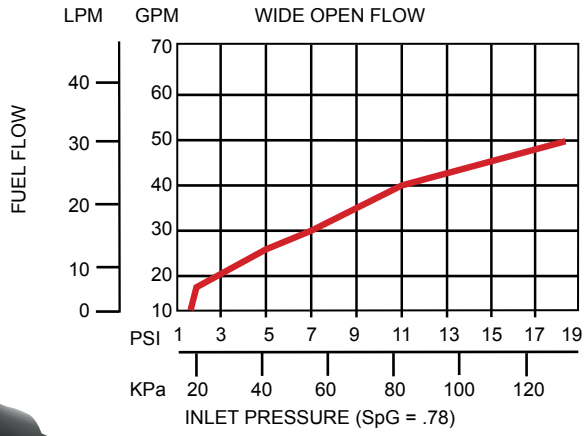

ISO 9001:2015 CERTIFIED COMPANY

UL

* Ex II 2 G
EN 13617-2 TYPE 1
EN 13617-4 STYLE 1

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

High Volume Swivel/STB

Husky® Model 005969 Swivel Safe-T-Break® Combination for truck and high volume fueling

Dimensions and System Options

Guards

MODEL NO.	DESCRIPTION
006534	Scuff Guard for Safe-T-Break®


Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007000	Safe-T-Break® Drain Cup

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR *CUSTOM*	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 *CUSTOM*
Red	-02	Silver	-09	Apple Green	-18 *CUSTOM*
Green	-03	BP Green	-16	Purple	-19 *CUSTOM*
Black	-04	M Blue	-25	Pink	-20 *CUSTOM*
Yellow	-05	Orange	-39	BPS Green	-22 *CUSTOM*
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number.
Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01).
For custom colors, a minimum order of 4,000 guards will be required.

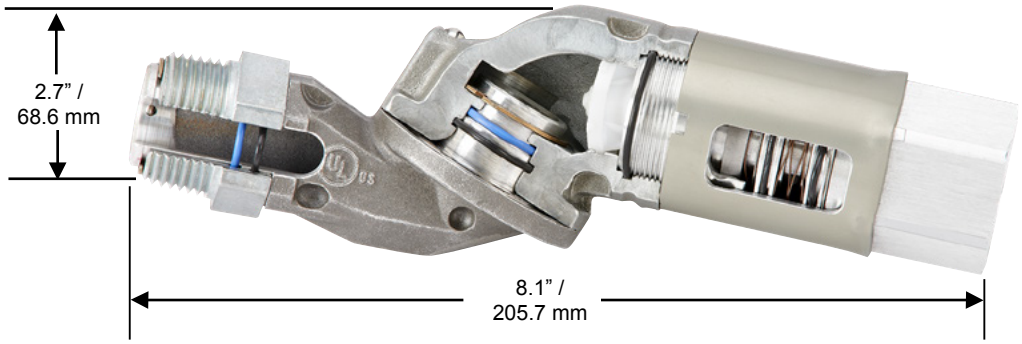

Rev 8 9/21