ECO Nozzles

Husky GENERAL FUELING PRODUCTS

Automatic shut-off conventional nozzle equipped with mechanical interlock.

- ECO nozzle shuts off when:
  - the gas tank is full.
  - the mechanical interlock is disengaged, or the nozzle falls from the vehicle's fill pipe.
- Nozzle is also equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal for added security.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Drip Less spout reduces/ eliminates drips from spout.
- Lightest insertion "force" of any safety interlock-operated nozzle.
- Aluminum casting with high-impact polymer handguard provides a lightweight, easier to handle conventional nozzle.
- Unique tilt poppet design provides precise "to-the-penny" dispensing.
- Optional cold weather seals are rated to -40°F/C.
- CARB certified per CP-207 for drips, spills, spitting and liquid retention.
- Comes standard with smooth full grip guard.
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.
- All seals are UL approved fluorocarbon compounds to prevent degradation from ethanol blends
- Compatible with unleaded and all ethanol blends through E-25



MODEL NO.
1190404

New Unleaded PHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1190404*	with Two Notch Hold Open Clip	2.8 (1.3)
1190408*	without Hold Open Clip	2.8 (1.3)
1474504	with Two Notch Hold Open Clip and Cold Weather Seals	2.8 (1.3)
11904180*	with Two Notch Hold Open Clip and Flo-Equalizer®	2.8 (1.3)
E1190404*	with Two Notch Hold Open Clip, Mate Guard and Polymer Handle Cover	2.8 (1.3)

New Unleaded Nozzles with BSP Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
E1190416*	with Two Notch Hold Open Clip, Mate Guard and Polymer Handle Cover	2.8 (1.3)
1190416*	with Two Notch Hold Open Clip	2.8 (1.3)

New E25 Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1708404	with Two Notch Hold Open Clip	2.8 (1.3)
E1708404	with Two Notch Hold Open Clip, Mate Guard and Polymer Handle Cover	2.8 (1.3)

ISO 9001:2015 CERTIFIED COMPANY

c UL us

* CALIFORNIA AIR RESOURCES BOARD


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Husky
GENERAL FUELING PRODUCTS

ECO Nozzles


Automatic shut-off conventional nozzle equipped with mechanical interlock.


Dimensions

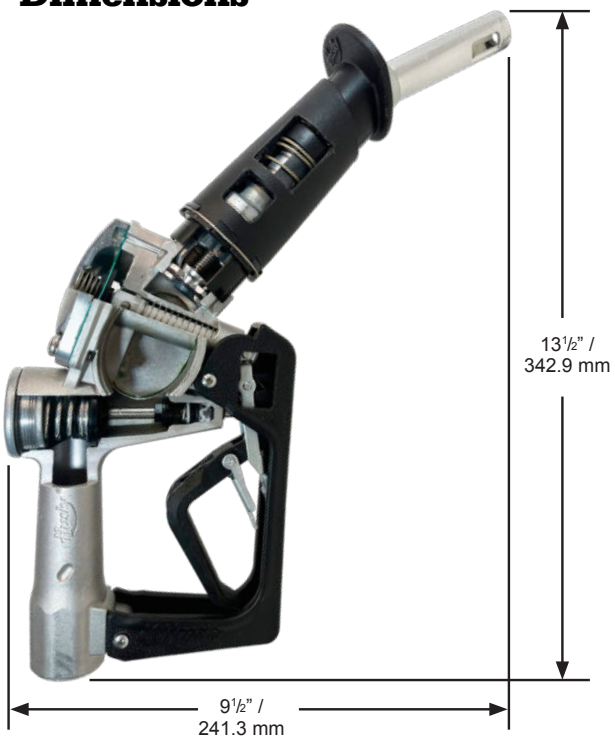

Construction

Body	One piece die cast aluminum with high-impact polymer handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	Two piece polymer EZ Lever
Inlet	3/4" (19 mm) NPT or 3/4" (19 mm) BSP

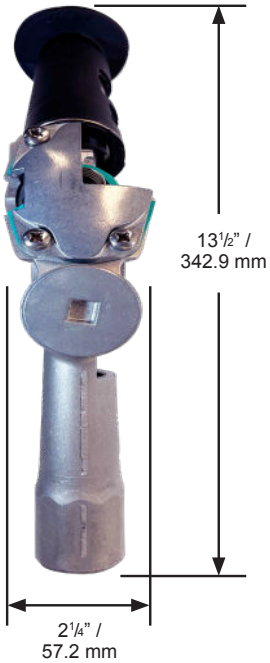

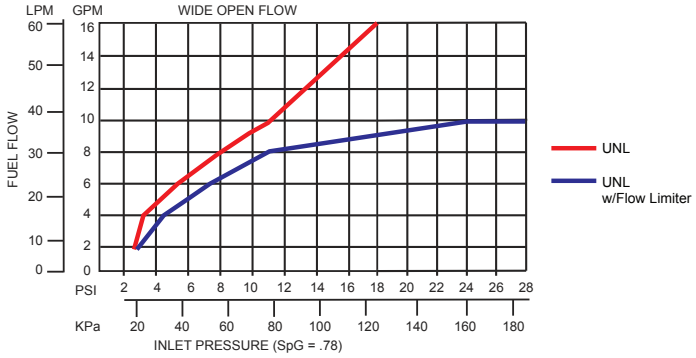

ECO Nozzles


Automatic shut-off conventional nozzle equipped with mechanical interlock.

Nozzle Options



Nozzle Guard Options

Full Grip Guard	POPD®S Full Grip Guard	POPD®H Full Grip Guard	Mate Guard	POPD®S Mate Guard	POPD®H Mate Guard
					


Lever Options

Lever without Hold Open Clip	Lever with Hold Open Clip
	

Latch Plate Options

1 - Position Latch Plate	2 - Position Latch Plate
	

Flo-Equalizer® Option

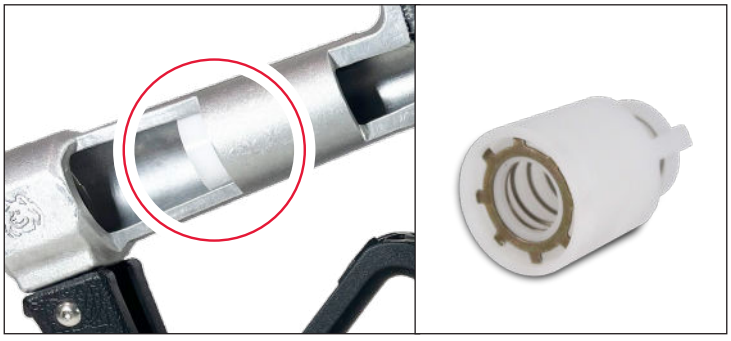

Husky GENERAL FUELING PRODUCTS

ECO Nozzles

Automatic shut-off conventional nozzle equipped with mechanical interlock.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002273	3/4" F x 3/4" F NPT Non-Reconnectable Safe-T-Break®
002774	3/4" F x 3/4" F BSPP Non-Reconnectable Safe-T-Break®
003360	3/4" F x 3/4" F NPT Reconnectable Safe-T-Break®
003385	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break®
005230	3/4" F x 3/4" F NPT Low Pull Reconnectable Safe-T-Break®
006130	3/4" F x 3/4" F NPT Non-Reconnectable PCC Safe-T-Break®
008330	3/4" F x 3/4" F NPT Reconnectable MAGBREAK®
009910	3/4" F x 3/4" F BSPP Reconnectable MAGBREAK®
010328	3/4" F x 3/4" F NPT Reconnectable High Pull MAGBREAK®
010330	3/4" F x 3/4" F BSPP Reconnectable High Pull MAGBREAK®
002774A	3/4" F x 3/4" F BSPP Non-Reconnectable Safe-T-Break® - Atex
003385A	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break® - Atex

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
006310	3/4" M NPT Multi-Plane Swivel connected to 3/4" F NPT Reconnectable Safe-T-Break®
007085	3/4" M BSPP Multi-Plane Swivel connected to 3/4" F BSPP Reconnectable Safe-T-Break®
007085A	3/4" M BSPP Multi-Plane Swivel connected to 3/4" F BSPP Reconnectable Safe-T-Break® - Atex

Spouts

MODEL NO.	DESCRIPTION
013664	Unleaded ECO Spout Assembly Kit

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
000397	Unleaded Spout Gauge
004490	Conventional Flo-Equalizer® - 10 gpm / 37.9 Lpm
007089	Nozzle Service Kit
007490	Internal Flo-Equalizer® - 10 gpm / 37.9 Lpm

Swivels

MODEL NO.	DESCRIPTION
000350	3/4" M x 3/4" F NPT Multi-Plane Swivel
000355	3/4" M x 3/4" F NPT Multi-Plane Swivel Anodized Black
002272	3/4" M x 3/4" F NPT 90° Pump Swivel
002771	3/4" M x 3/4" F BSPP 90° Pump Swivel
003590	3/4" M x 3/4" F BSPP Multi-Plane Swivel
003895	3/4" M x 3/4" F NPT Inline Swivel
002771A	3/4" M x 3/4" F BSPP 90° Pump Swivel - Atex
003590A	3/4" M x 3/4" F BSPP Multi-Plane Swivel - Atex

Guards

MODEL NO.	DESCRIPTION
014034	Full Grip Nozzle Guard
016424	Mate Guard
016425	Handle Cover
016423	Mate Guard & Handle Cover Kit

Low Perm Hoses

MODEL NO.	DESCRIPTION
CP12LP8.5	3/4" Low Perm Hardwall 8.5' Assembly Hose
CP12LP8.5SV	3/4" Low Perm Hardwall 8.5' Assembly Hose Swivel
CP12LP9	3/4" Low Perm Hardwall 9' Assembly Hose
CP12LP9SV	3/4" Low Perm Hardwall 9' Assembly Hose Swivel
CP12LP.75	3/4" Low Perm Hardwall 9' Assembly Hose
CP12LP.75SV	3/4" Low Perm Hardwall 9' Assembly Hose Swivel

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR *CUSTOM*	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 *CUSTOM*
Red	-02	Silver	-09	Apple Green	-18 *CUSTOM*
Green	-03	BP Green	-16	Purple	-19 *CUSTOM*
Black	-04	M Blue	-21	Pink	-20 *CUSTOM*
Yellow	-05	Orange	-39	BPS Green	-22 *CUSTOM*
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number.
Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01).
For custom colors, a minimum order of 4,000 guards will be required.

Husky A BREED APART®
2325 Husky Way • Pacific, MO 63069
(800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.