Inline Combo Swivel/STB

Inline combo

- Single Plane 360˚Rotation
- Unique to Husky® products, the steel ball bearing design provides easier joint movement during high pressure applications.
- Safe-T-Break® is service reconnectable
- Check valve to stop flow of fuel on hose side
- Check valve O-ring to ensure reliable fuel shut-off
- Separates between 180 lbs. and 337 lbs.
- Separates at angles up to 90˚
- Compact and easy to handle
- Fuel/Diesel or DEF versions available





Inline Combo

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
012828	3/4" BSP M x 3/4" BSP F, DEF	.90 (.40)
012831	3/4" BSP M x 3/4" NPT F, DEF	.90 (.40)
012887	3/4" BSP M x 1" BSP F, DEF	.90 (.40)
012890	3/4" BSP M x 1" BSP M, DEF	.80 (.36)
013185	M34 M x 1" BSP M, DEF	.80 (.36)
013530A*	1" BSP M x 1" BSP M, Standard Fuel, Atex	.90 (.40)
013827A*	3/4" BSP M x 3/4" BSP M Standard Fuel, Atex	.80 (.36)
014438A*	1" BSP M x 1" BSP M, DEF, Atex	.90 (.40)

Construction

Body	Body: Anodized aluminum / Alodined Aluminum
Seals	Fluorocarbon
Nuts	DEF - Stainless steel, Fuel - electroless nickel-plated steel
Threads	BSP, NPT and M34

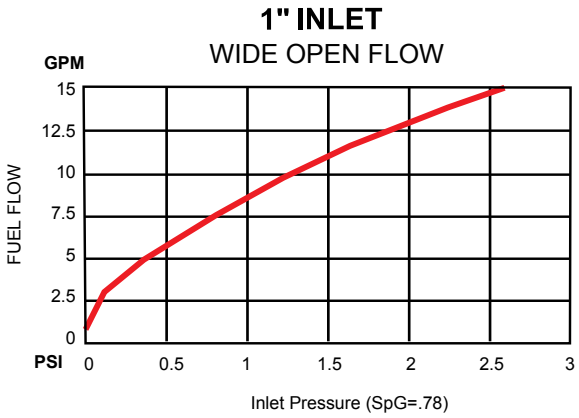

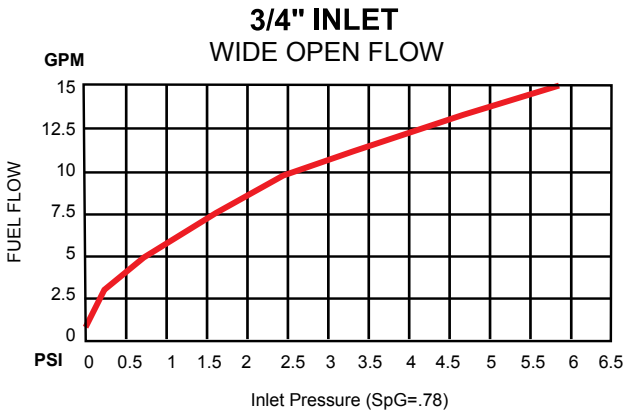

* Ex II 1 G EN13617 Type 2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Inline Combo Swivel/STB

Inline combo

Dimensions and System Options

Guards

MODEL NO.	DESCRIPTION
016939	Scuff Guard for Safe-T-Break®

Color Chart

COLOR	SUFFIX	COLOR	SUFFIX
Blue	-01	White	-06
Red	-02	Gold	-08
Green	-03	Silver	-09
Black	-04	BP Green	-16
Yellow	-05	Pink	-20

**Safe-T-Breaks® and Safe-T-Break® Scuff Guards are to be ordered with the corresponding guard color option added to the model number.

Example: If BLUE guards are desired, add guard color option -01 to the model number (004034-01).

For custom colors, a minimum order of 4,000 guards will be required.



Rev 4 6/25