Inline STB

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

- Threads directly into nozzle inlet
- Separates at 180-337 lbs (800-1500N)
- Reconnectable
- Stops flow on hose side of break
- Separates at angles up to 90 degrees
- Aluminum internal flow director - stronger than Elaflex plastic design
- Check valve o-ring to ensure reliable fuel shut-off, not included on Elaflex


New Inline SAFE-T-BREAK®

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
008521A	Inline Safe-T-Break®	.45 (.20)

Construction

Body	Aluminum
Seals	Fluorocarbon
Threads	M34 x 1.5



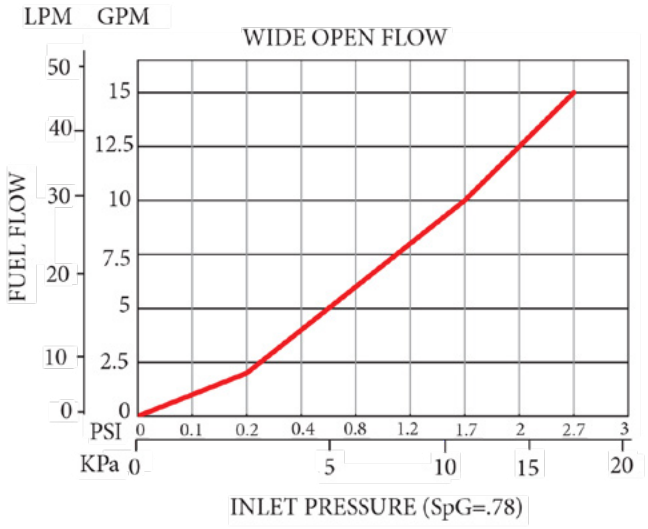

ISO 9001:2015 CERTIFIED COMPANY

* Ex II 1 G EN13617 Type 2


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Inline STB

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Dimensions



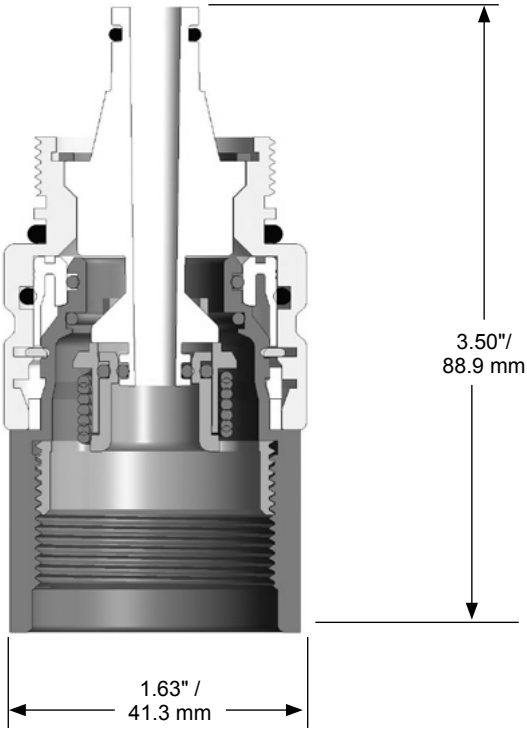

Rev 2 1/20