Vacuum Assist STB

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Model 004034

- Reconnectable Safe-T-Break® for the vapor assist systems: coaxial hoses with fuel "outside" hose, vapor return "inside" hose
- EVR Certified per CARB CP-201
- Meets the reconnect endurance test of the UL Standard 567
- Unique vapor valve stops vapors from escaping after a drive away.
- Separates at less than 200 lbf/889.6 N to minimize backlash damage
- Unique pre-loaded shock absorbing wave spring minimizes nuisance breaks.

Models 004034A/005134A

- Separates between 180-337 lbf/800-1500 N

Model 006560

- Reconnectable Safe-T-Break in the same style and design as the Model 004034 including the same fuel/vapor paths and separation force
- 1-1/4" X 18 threads
- EVR Certified per CARB CP-201

Model 005134

- Non-reconnectable Safe-T-Breaks® in the same style and design as Model 004034, including the same fuel/vapor paths and separation force
- EVR Certified per CARB CP-201

Model 015377

- Non-reconnectable Safe-T-Breaks® in the same style and design as Model 006560, including the same fuel/vapor paths and separation force
- EVR Certified per CARB CP-201

Reconnectable


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
004034	Reconnectable Safe-T-Break®	1.0 (.45)
004034A*	Reconnectable Safe-T-Break® - Atex	1.0 (.45)
006560	Reconnectable Safe-T-Break® for 1-1/4" THREADS	1.0 (.45)


Non-reconnectable

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
005134	Non-reconnectable Safe-T-Break®	1.0 (.45)
005134A*	Non-reconnectable Safe-T-Break® - Atex	1.0 (.45)
015377	Non-reconnectable Safe-T-Break® 1-1/4"	1.0 (.45)

Construction

Body	Aluminum
Seals	Fluorocarbon
Springs Springs	Stainless Steel Stainless Steel Stainless steel load and latch spring reverse mechanism Hardened stainless steel latch ring and balls
Threads	004034, 004034A, 005134 and 005134A = M34 x 1.5 006560 and 15377= 1-1/4" x 18

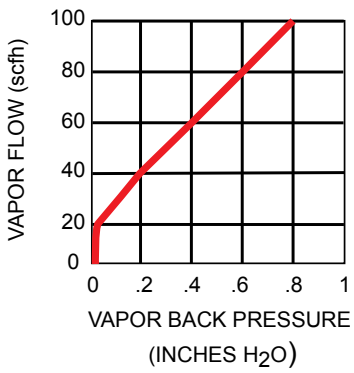

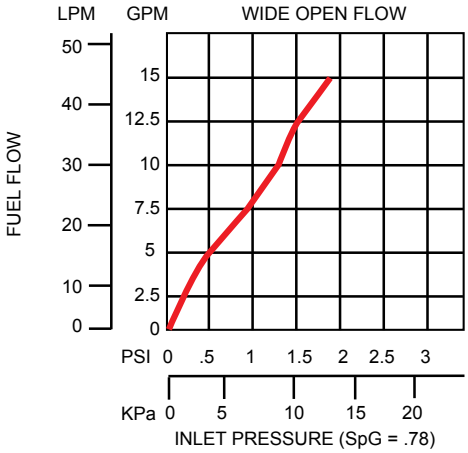



Model 004034



Model 005134

ISO 9001:2015 CERTIFIED COMPANY

c UL us

Ex II 1 G EN13617 Type 2

CALIFORNIA AIR RESOURCES BOARD

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Vacuum Assist STB

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Dimensions and System Options

Guards

Model No.	Description
003098**	Scuff Guard for 004034, 004034A, 005134, 005134A and 006560 Safe-T-Breaks®

Guard Color Chart


COLOR	SUFFIX	COLOR	SUFFIX	COLOR *CUSTOM*	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 *CUSTOM*
Red	-02	Silver	-09	Apple Green	-18 *CUSTOM*
Green	-03	BP Green	-16	Purple	-19 *CUSTOM*
Black	-04	M Blue	-25	Pink	-20 *CUSTOM*
Yellow	-05	Orange	-39	BPS Green	-22 *CUSTOM*
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number.
Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01).
For custom colors, a minimum order of 4,000 guards will be required.

Model 004034




Model 005134

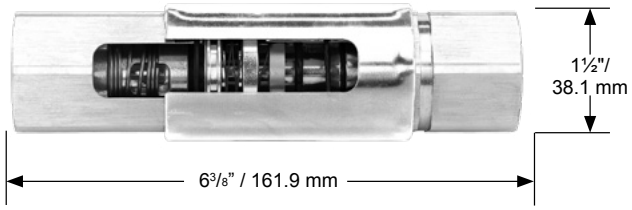

Model 006560



Model 015377

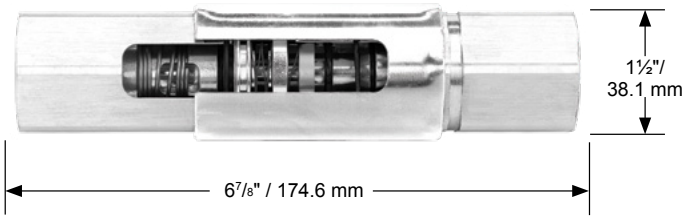

Rev 8 11/21