1AS Nozzles

Husky GENERAL FUELING PRODUCTS

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

- 1AS nozzle shuts off when:
  - the pump shuts off.
  - the gas tank is full.
  - the lever is opened before the pump is turned on.
  - the leak detector has not completed the test cycle.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Comes standard with smooth full grip guard.
- Optional tilt poppet design provides precise "to-the-penny" dispensing.
- Optional cold weather seals are rated to -40°F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser's proximity switch, or can be provided without the magnet for dispensers equipped with a standard "flapper" switch.
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.



MODEL NO.
1215904

New Unleaded PHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1215904	with Two Notch Hold Open Clip and Polymer Handguard	3.3 (1.4)
12159209	with Two Notch Hold Open Clip, Polymer Handguard and 385 Reducer Bushing	3.4 (1.5)

New Light Duty Diesel PHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1215903	with Two Notch Hold Open Clip and Polymer Handguard	3.3 (1.4)
1215961	with Two Notch Hold Open Clip, Polymer Handguard and 1808 Waffle Splash Guard	3.4 (1.5)
1398903	with Two Notch Hold Open Clip, Polymer Handguard and Cold Weather Seals	3.3 (1.4)
12159208	with Two Notch Hold Open Clip, Polymer Handguard and 385 Reducer Bushing	3.4 (1.5)
E1215903	with Two Notch Hold Open Clip, Polymer Handguard, Mate Guard and Polymer Handle Cover	3.3 (1.4)
12159263A*	with Two Notch Hold Open Clip, Polymer Handguard, 1808 Waffle Splash Guard and Inlet Screen, Atex	3.4 (1.5)
1215903N^	with Two Notch Hold Open Clip and Polymer Handguard	3.3 (1.4)
1691103N^	with Two Notch Hold Open Clip, Polymer Handguard, 1808 Waffle Splash Guard and Cold Weather Seals	3.3 (1.4)

New Light Duty Diesel PHG Nozzles with M34 Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
E12159294N^	with Two Notch Hold Open Clip and Polymer Handguard	3.3 (1.4)

^ NOT LISTED

ISO 9001:2015 CERTIFIED COMPANY

c UL us

B100 COMPATIBLE


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov


Husky
GENERAL FUELING PRODUCTS

1AS Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

Dimensions

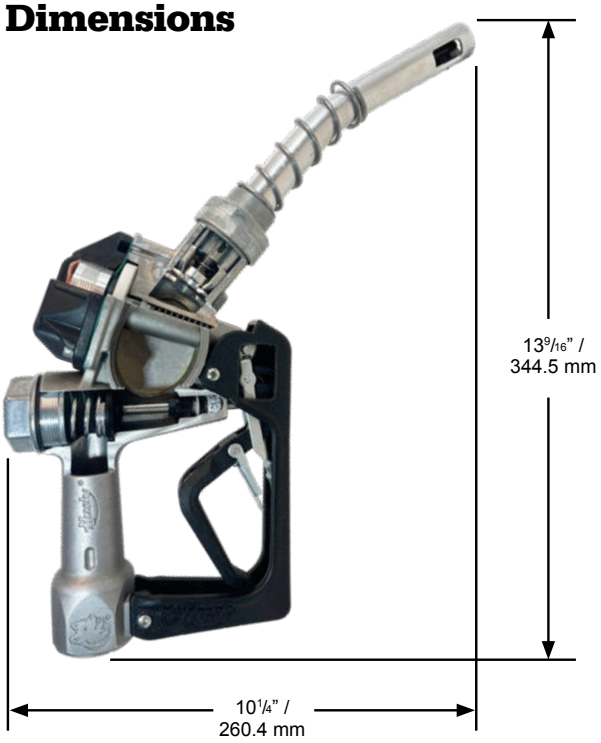

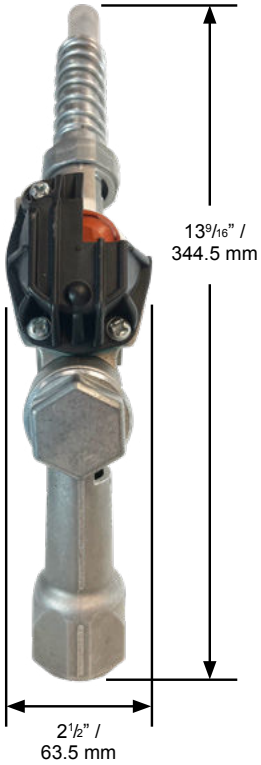

New Unleaded MHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1216204	with Two Notch Hold Open Clip and Metal Handguard	3.5 (1.6)

New Light Duty Diesel MHG Nozzles with NPT Inlet


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1216203	with Two Notch Hold Open Clip and Metal Handguard	3.5 (1.6)
1399203	with Two Notch Hold Open Clip, Metal Handguard and Cold Weather Seals	3.5 (1.6)

New Light Duty Diesel MHG Nozzles with M34 Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
E16576294N^	with Two Notch Hold Open Clip, Metal Handguard and Cold Weather Seals	3.5 (1.6)

Construction

Body	One piece die cast aluminum with high-impact polymer or metal handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	Two piece polymer EZ Lever
Inlet	1" (25.4 mm) NPT, 1" (25.4 mm) BSP or M34 x 1.5 mm

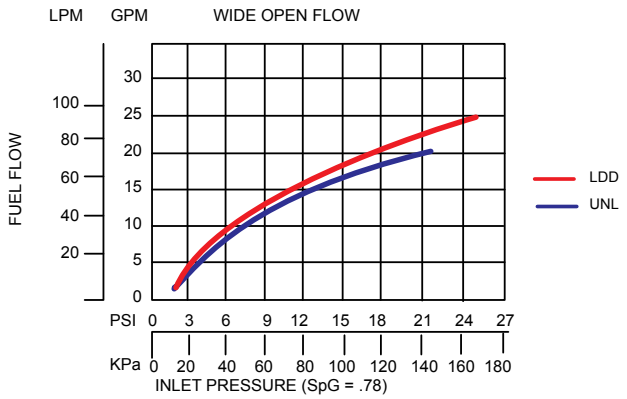

Husky
GENERAL FUELING PRODUCTS

1AS Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options

Full Grip Guard



POPD®S Full Grip Guard



POPD®H Full Grip Guard



Mate Guard



POPD®S Mate Guard



POPD®H Mate Guard



Waffle Guard Options

1808 Waffle Guard



Reducer Bushing

000385



Handguard Options

Standard Polymer Handguard



Standard Metal Handguard



Gilbarco Polymer Handguard (with or without Magnet)



Tokheim Polymer Handguard (with or without Magnet)




Wayne Polymer Handguard (with or without Magnet)



Lever Options

Lever without Hold Open Clip




Lever with Hold Open Clip




Latch Plate Options

1 - Position Latch Plate



2 - Position Latch Plate



Husky GENERAL FUELING PRODUCTS

1AS Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
005231	1" F x 1" F Low Pull NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®
008331	1" F x 1" F NPT CK Reconnectable MAGBREAK®
009911	1" F x 1" F BSPP Reconnectable G2 MAGBREAK®

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
005969	1" M NPT Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break®
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break® - Atex Spouts

Spouts

MODEL NO.	DESCRIPTION
001471	Light Duty Diesel Spout
001473	Unleaded Spout
010353	Light Duty Diesel Long Spout
010434	Unleaded Long Spout

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
000385	1" M x 3/4" F Reducer Bushing
000397	Unleaded Spout Gauge
003593	Hold Open Clip Kit
007089	Nozzle Service Kit

Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
000095	1" M x 1" F NPT 70° Multi-Plane Swivel
000352	1" M x 3/4" F NPT Multi-Plane Swivel
000356	1" M x 3/4" F NPT Multi-Plane Swivel Anodized Black
003306	1" M x 1" F BSPP Multi-Plane Swivel
003306A	1" M x 1" F BSPP Multi-Plane Swivel - Atex
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
004860	1" M x 1" F NPT Multi-Plane High Volume Swivel
006949	1" M x 1" F BSPP Multi-Plane High Volume Swivel

Guards

MODEL NO.	DESCRIPTION
001807	Waffle Splash Guard with Smaller Hole
001808	Waffle Splash Guard
005494	Lever Guard
007295	Mate Handle Guard
012164	Full Grip Guard

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR *CUSTOM*	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 *CUSTOM*
Red	-02	Silver	-09	Apple Green	-18 *CUSTOM*
Green	-03	BP Green	-16	Purple	-19 *CUSTOM*
Black	-04	M Blue	-21	Pink	-20 *CUSTOM*
Yellow	-05	Orange	-39	BPS Green	-22 *CUSTOM*
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number.
Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01).
For custom colors, a minimum order of 4,000 guards will be required.

Husky A BREED APART®
2325 Husky Way • Pacific, MO 63069
(800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.